



www.AKCP.com

Fax Action Wizard

This tutorial provides you the information needed to setup a fax action via the notification wizards.

To get to the starting point of this tutorial:

- Log in as administrator
- Click the “Notifications” tab


1. Adding a notification

a) First click on the “notification wizard”


The screenshot shows the AKCP securityProbe web interface. The top navigation bar includes tabs for Summary, Map, Picture Log, Sensors, Notification, Settings, Applications, and Help. The 'Notification' tab is highlighted. Below the navigation bar, there is a 'Notification Menu' on the left with a 'Begin Notification Wizard' link circled in red. A red arrow points from this link to a text box that says 'Click here to begin setting up a notification'. The main content area displays a table of actions with columns for 'Action Type' and 'Action Name'. The table lists various actions such as SNMP Trap, Email, Alarm Sound, Speech, and Picture Log. Below the table are buttons for 'Create', 'Duplicate', 'Edit', 'Remove', and 'Test Action'. The bottom of the page shows the Windows taskbar with several open applications and the system clock at 7:15 PM.

Action Type	Action Name
SNMP Trap	SNMP Trap 1
	SNMP Trap 2
	SNMP Trap 3
	SNMP Trap 4
	SNMP Trap 5
	SNMP Trap 6
Email	Email 1
	Email 2
	Email 3
Alarm Sound	Alarm Sound 1
	Alarm Sound 2
Speech	Speech 1
	Speech 2
	Speech 3
Picture Log	Picture Log 1

b) You will now have the notification wizard page displayed, like below.

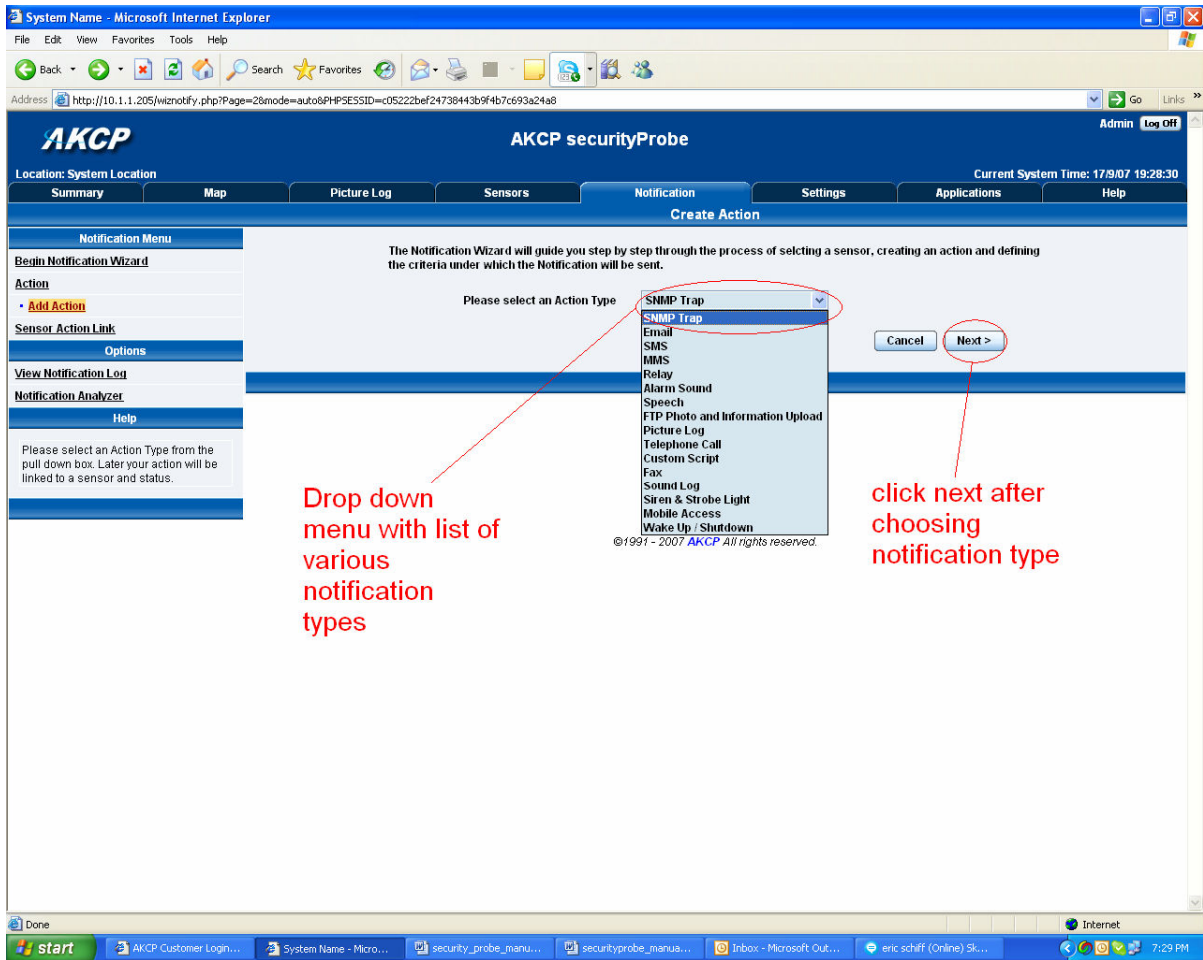

c) Select Fax from the notification type options.

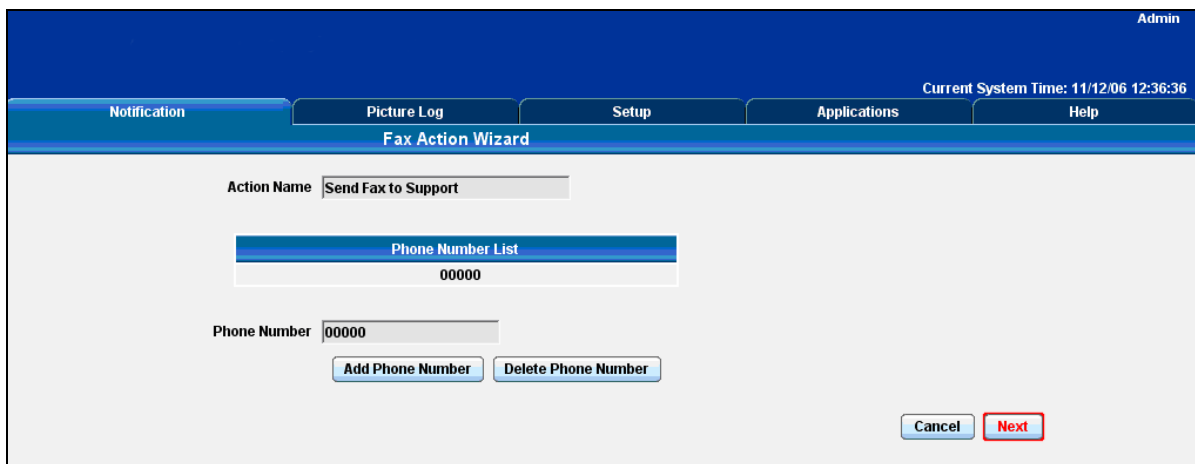

This is a preview of the message that will be sent to your recipient(s). The message sent will include the details relevant to your sensor.

Click **Customize** to change the format of this message. The items in your message with a dollar sign and parentheses e.g. \$[TIME] represents the data to be imported into your message at the time of sending. Please click the **Macro Description** button for a full list.

Admin
Current System Time: 11/12/06 12:53:58

Notification Picture Log Setup Applications Help

Fax Action Wizard

Fax Modem Port COM1
Process Timeout 180 Seconds

Cancel Back Next

Select the connection method between your Fax Modem and computer and the Timeout for the process.

Admin
Current System Time: 11/12/06 13:00

Notification Picture Log Setup Applications Help

Fax Action Wizard

Maximum Times to Resend 0
Resend Intervals (secs) 10

Cancel Back Finish

Define the Maximum number of Times and interval between sending faxes.

Click **Finish** to Save your Action